

EVA胶膜生产线

EVA Glass Adhesive Film Extrusion Line

典型应用: 用于室内隔断和带有图案及花纹的装饰性玻璃、塑料夹层板等等; 用于太阳能光伏电池组件胶膜、建筑物玻璃幕墙、功能性棚膜、包装膜、热熔胶、鞋材等各种行业。

Application: Used for indoor partition, decorative glass with patterns, plastic sandwich panels, etc; Adhesive film for solar photovoltaic cell module, building glass curtain wall, functional shed film, packaging film, hot melt adhesive, shoes material and other industries.



主要技术参数 Main technical specification

机型Model	JWS120	JWS150	JWS160	JWS180	JWS180+JWS180
制品宽度Products width(mm)	1200-2000	2000-2400	2000-2600	2000-2800	2400-3000
设计挤出机产量Design max capacity(kg/h)	300-400	350-450	400-500	500-600	800-1100

备注: 以上规格参数如有变更, 恕不另行通知。Note: The specifications are subject to change without prior notice.

www.jwell.cn

品质卓越 完美如一



**EVA/PVB/SGP/TPU
Glass Interlayer Film Extrusion Line
夹层玻璃中间膜生产线**

**金纬机械
JWELL MACHINERY**

PVB中间膜生产线

PVB Glass Adhesive Film Extrusion Line

典型应用: 用于汽车夹层玻璃, 防弹玻璃, 隔音玻璃, 光伏玻璃, 彩色玻璃等。在具有安全性能的同时, 还有优异的防紫外线、隔音、光控、保温、隔热、防震等性能, 是理想的安全玻璃复合材料。

Application: used for automotive laminated glass, bullet proof glass, sound proof glass, photovoltaic glass, color glass, etc. In addition to safety performance, it also has excellent anti ultraviolet, sound insulation, light control, heat preservation, heat insulation, shock resistance and other properties. It is an ideal safety glass composite material.



主要技术参数 Main technical specification

机型	制品宽度	设计挤出机产量
Model	Products width(mm)	Design max capacity(kg/h)
JWS150	2000-2600	400-500
JWE95	2000-2800	450-600
JWE120	2400-3600	1000-1200
JWE135	2400-3800	1200-1500
JWE95+JWE65	2000-3200	600-700

备注: 以上规格参数如有变更, 恕不另行通知。Note: The specifications are subject to change without prior notice.

SGP玻璃夹胶膜生产线

SGP Glass Adhesive Film Extrusion Line

SGP胶膜(离子中间膜): 离子型胶片SGP的剪切模是PVB的50倍以上, 撕裂强度时PVB的5倍, 承载力是PVB夹层玻璃的2倍, 在相等荷载、相同厚度的情况下, SGP夹层玻璃的弯曲只是PVB夹层玻璃的的1/4。相对于PVB生产的夹层玻璃, SGP胶片生产的夹层玻璃的性能更加优越。

SGP glass adhesive film (ionic intermediate film): the shear mode of ionic film SGP is more than 50 times than PVB, the tear strength is 5 times than PVB, and the bearing capacity is 2 times than PVB laminated glass. Under the same load and thickness, the bending of SGP laminated glass is only 1/4 of PVB laminated glass. Compared with the laminated glass produced by PVB, the performance of laminated glass produced by SGP film is more superior.

典型应用: 天棚玻璃, 结构玻璃建筑、玻璃栈道、高层外墙、玻璃幕墙等。

Application: Ceiling glass, structural glass building, glass plank road, high-rise exterior wall, glass curtain wall, etc.



主要技术参数 Main technical specification

机型	制品宽度	制品厚度	设计挤出机产量
Model	Products width(mm)	Products thickness(mm)	Design max capacity(kg/h)
JWE85	1400-2300	0.76-2.28	400-500
JWE95	2400-3800	0.76-2.28	500-600

备注: 以上规格参数如有变更, 恕不另行通知。Note: The specifications are subject to change without prior notice.

TPU玻璃夹胶膜生产线


TPU Glass Adhesive Film Extrusion Line

TPU玻璃中间胶膜: TPU作为新型的玻璃夹胶膜材料, 透明度更高, 永不黄变, 对玻璃的粘接强度更高, 耐寒性能更突出。

TPU Glass Adhesive Film: As a new type of glass laminated film material, TPU has higher transparency, never yellowing, higher bonding strength to glass and more outstanding cold resistance.

典型应用: 航空航天、高速列车、军民用直升机、客机、运输机挡风玻璃、防弹装甲、银行防爆, 光伏等行业。

Application: Aerospace, high-speed trains, military and civilian helicopters, passenger aircraft, transport aircraft windshield, bulletproof armor, bank explosion-proof, photovoltaic and other industries.

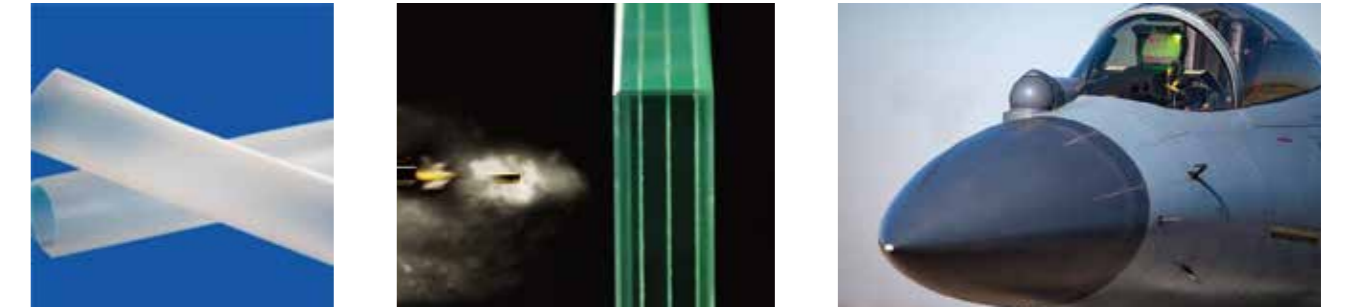

主要技术参数 Main technical specification

机型	制品宽度	制品厚度	设计挤出机产量
Model	Products width(mm)	Products thickness(mm)	Design max capacity(kg/h)
JWS130	1400-2000	0.3-1.8	200-300
JWS150	1600-2200	0.3-1.8	300-400

备注: 以上规格参数如有变更, 恕不另行通知。Note: The specifications are subject to change without prior notice.